

Equipado con:

- Mangueras de caucho sintético negro 2SC
- Empalmes de acero galvanizado
- Junto giratorio 90° de acero galvanizado
- Juntas de poliuretano



F-400

Artículo	Long. manguera	Ø manguera	Rosca entrada-salida
070-1207-200	sin manguera	-	M1/4"G - M1/4"G
070-1207-300	sin manguera	-	M3/8"G - M3/8"G
070-1207-110	10 m	1/4"	M1/4"G - M1/4"G
070-1207-115	15 m	1/4"	M1/4"G - M1/4"G
070-1207-310	10 m	3/8"	M3/8"G - M1/4"G



F-460

070-1307-200	sin manguera	-	M1/4"G - M1/4"G
070-1307-300	sin manguera	-	M3/8"G - M3/8"G
070-1307-118	18 m	1/4"	M1/4"G - M1/4"G
070-1307-315	15 m	3/8"	M3/8"G - M1/4"G



F-550


070-1407-300	sin manguera	-	M3/8"G - M3/8"G
070-1407-320	20 m	3/8"	M3/8"G - M1/4"G
070-1407-325	25 m	3/8"	M3/8"G - M1/4"G






F-555

070-1507-300	sin manguera	-	M3/8"G - M3/8"G
070-1507-330	30 m	3/8"	M3/8"G - M1/4"G

DIMENSIONES FIJAS

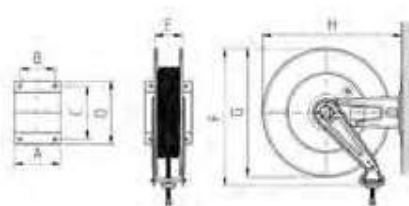

Mod.	A	B	C	D	E	F	G	H			
F-400	158	120	168	192	95	450	400	435	12,50<19,50	0,046	1
F-460	158	120	168	192	95	480	460	500	16,50<23,00	0,060	1
F-550	200	150	225	270	120	590	550	600	22,00<45,00	0,085	1
F-555	250	200	225	270	170	590	550	600	26,00<53,00	0,100	1